



**TOYOBO TOYOBO MC Corporation**

**Photo-Functional Materials Sales Section**  
Osaka Umeda Twin Towers South, 1-13-1 Umeda,  
Kita-ku, Osaka 530-0001 Japan  
T. +81-6-6348-3062 F. +81-6-6348-3099  
[www.toyobo-global.com/products/xk/index.html](http://www.toyobo-global.com/products/xk/index.html)




All products are produced with a quality control system as certified by "ISO 9001" for the world

2022.10.1000 (F2077K)


**TOYOBO TOYOBO MC Corporation**

## Feature of Cosmolight™ CTP

1. Solvent-free in the plate-making process, toxic-free for operators.
2. Total plate-making time within one hour.
3. Built-in flat top dot reproduced with TOYOBO's unique LAMS technology. It achieves minimum dot gains and consistent print quality.
4. Compatible with various screening technologies.

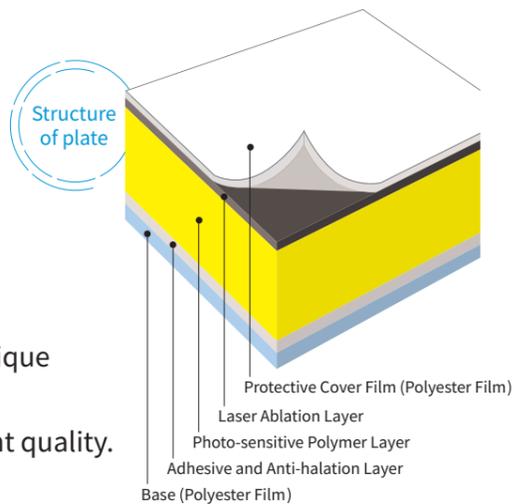


### / Dot Shape /

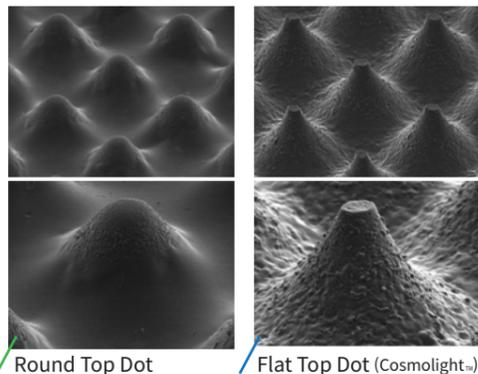

## Cosmolight™ CTP Plate-making Process

Washout in tap water at 40°C (104°F) with a small amount of mild detergent. Cosmolight™ is a solvent-free process that improves a working environment in a plate-making room.

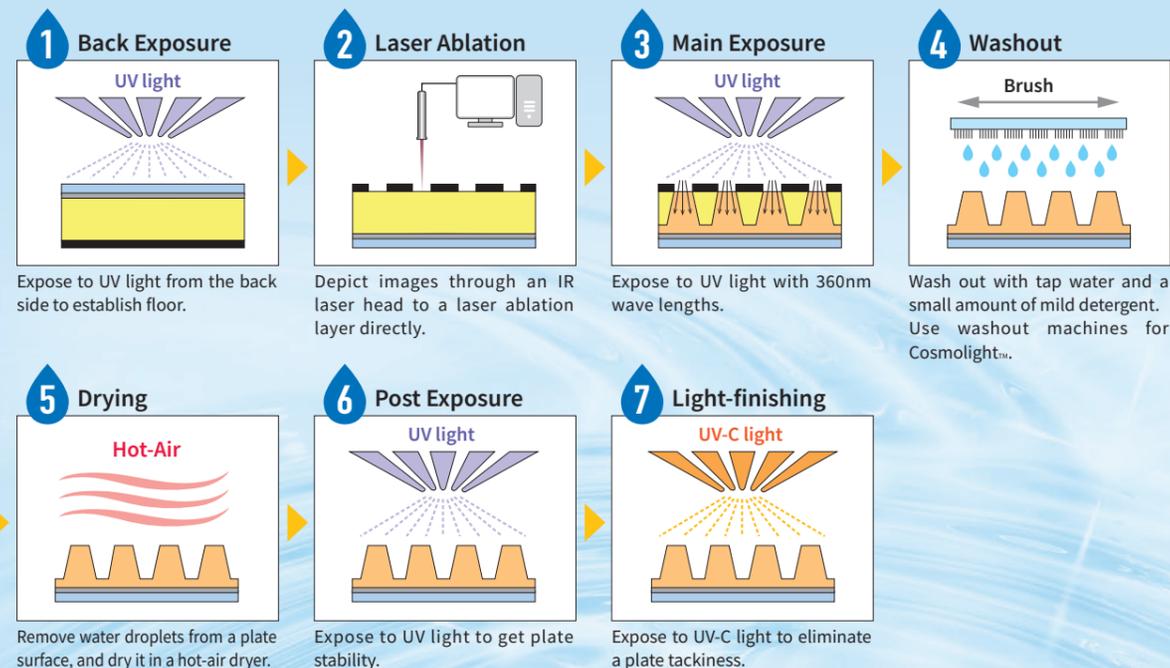

Please follow all the laws and regulations in your district for the treatment of washout solutions.

## The Environmentally Friendly Way to Process Flexo Plates

Water-wash Flexo Plate  
**Cosmolight™**


We, the pioneer of a water-wash letterpress plate, have commercialized the world's first water-wash flexo plate, Cosmolight™.

This revolutionary plate eliminates the use of toxic, environmentally damaging solvents from a plate-making process to produce a press-ready plate in one hour or less.


With TOYOBO's core technology in polymerization and modification, Cosmolight™ achieved a feature of water-wash and tolerance against water-based ink, as well as solvent-based, alcohol-based and UV inks.

## Feature of Cosmolight™

1. Washout in tap water with a small amount of mild detergent. The plate makes the working environment free from dangerous hydrocarbon and hazardous washout solvents.
2. Plates are "press-ready" within an hour and "press-down time" is dramatically reduced.
3. Rich ink transfer and sharp highlight, sometimes referred as contradictory characteristics, are ensured thanks to TOYOBO's unique polymer technology.
4. Solvent-based, water-based, alcohol-base and UV ink can be used with excellent resistance.
5. Excellent ink transfer and resistance with water-based varnish and UV varnish.
6. Excellent plate thickness accuracy, allows "kiss-touch" printing pressure.

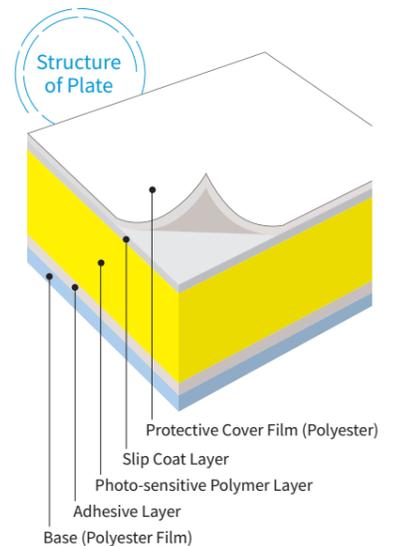

### Comparison of Plate-making Time

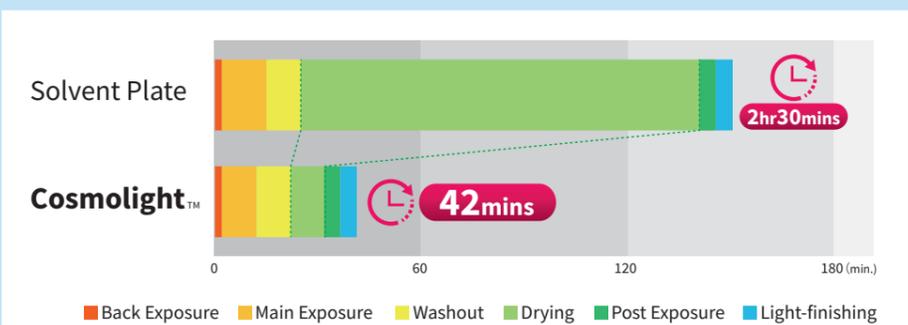

# Cosmolight™ Type and Application

		Plate Thickness (mm/inch)	Plate Hardness (Shore A)	Screen Reproducibility	Min. Fine Line (μm)	Min. Isolated Dot (μm)	Application							
							Cloth Tag	Envelope	Folding Carton	Label		Flexible Packaging	Coating	
										Paper	Film		Aqueous Varnish	UV Varnish
CTP	QZ	1.14 / 0.045	81	200lpi 1 ~ 95%	20	100								
		1.70 / 0.067	74	200lpi 1 ~ 95%	20	100								
	QH	0.95 / 0.037	83	175lpi 1 ~ 95%	40	150								
		1.14 / 0.045	81	175lpi 1 ~ 95%	40	150								
	QS	1.70 / 0.067	76	175lpi 1 ~ 95%	40	150								
		1.14 / 0.045	77	175lpi 1 ~ 95%	30	100								
		1.70 / 0.067	71	175lpi 1 ~ 95%	30	100								
		2.54 / 0.100	65	175lpi 1 ~ 95%	30	100								
	QO	2.84 / 0.112	64	175lpi 1 ~ 95%	30	100								
		1.14 / 0.045	71	150lpi 2 ~ 95%	50	150								
		1.70 / 0.067	60	150lpi 2 ~ 95%	50	150								
		2.54 / 0.100	52	150lpi 2 ~ 95%	50	150								
	QT	2.84 / 0.112	50	150lpi 2 ~ 95%	50	150								
		1.14 / 0.045	77	150lpi 2 ~ 95%	30	200								
Analog	NZ	1.14 / 0.045	81	175lpi 1 ~ 95%	30	100								
		1.70 / 0.067	74	175lpi 1 ~ 95%	30	100								
	NH	0.95 / 0.037	83	175lpi 1 ~ 95%	40	100								
		1.14 / 0.045	81	175lpi 1 ~ 95%	40	100								
	NS	1.70 / 0.067	76	175lpi 1 ~ 95%	40	100								
		1.14 / 0.045	77	175lpi 1 ~ 95%	30	100								
		1.70 / 0.067	71	175lpi 1 ~ 95%	30	100								
		2.54 / 0.100	65	175lpi 1 ~ 95%	30	100								
	NEO	2.84 / 0.112	64	175lpi 1 ~ 95%	30	100								
		1.14 / 0.045	71	150lpi 2 ~ 95%	50	150								
1.70 / 0.067		60	150lpi 2 ~ 95%	50	150									
2.54 / 0.100		52	150lpi 2 ~ 95%	50	150									
NTE	2.84 / 0.112	50	150lpi 2 ~ 95%	50	150									
	1.14 / 0.045	77	150lpi 2 ~ 95%	30	200									
		1.70 / 0.067	71	150lpi 2 ~ 95%	30	200								

※All figures are representative values.